

Club Car

TransPorter 6

TRANSPORTATION VEHICLE



TransPorter 6

Need more passenger capacity? The TransPorter 6 offers you just that: room for six. It allows you to offer passengers convenient transportation around the facility or throughout the grounds. For those demanding jobs, every TransPorter model offers hard body construction, independent



front suspension and semi-independent rear suspension — standard. So you can expect a tough, durable exterior while enjoying a smooth, stable ride. You can count on Club Car — the world's largest producer of electric vehicles — to deliver innovative transportation solutions of the highest quality.



Features

Club Car's exclusive ZEV IQ Plus system or 11.5 hp gas engine



Fixed rear seat (fold-down seat available)



Rugged, rustproof aluminum frame, and chassis



Molded, seamless vinyl seats



Self-adjusting, maintenance-free rack & pinion steering




ArmorFlex® fade-resistant front body



Standard Color: *Dark Gray*

Optional Colors: *Beige, Gray, Green, White, Classic Blue, Red, Black and Burgundy*

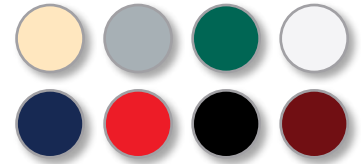

6-ply, premium tread tires



Smooth, independent front and semi-independent rear suspension

Additional Features

- **Maximum speed of 17 mph (27.3 kph)** (Electric vehicles only)
- **1,500 lb (681 kg) total vehicle capacity**
- **Seating for six**
- **Maximum hp @ 3,600 rpm exceeds SAE J1940 Performance Standards**
- **Redesigned hip restraint for maximum styling and comfort**
- **48-volt ZEV IQ Plus electric motor or 351 cc, 11.5 hp gas, pedal-start engine**
- **Headlights, taillights, brakelights and horn**
- **Reconfigured dash**
- **Side fuel fill**

Specifications

TransPorter 6 Electric
with exclusive ZEV IQ Plus System



TransPorter 6 Gasoline

POWER SUPPLY	Engine	N/A	Kawasaki 4-cycle, OHV, 351 cc, single cylinder, air-cooled, pressure-lubricated, spin-on oil filter
	Drive Motor	48-volt shunt/sepex	N/A
	Horsepower	3.7 @ 3400 rpm (continuous) 21.0 @ 2000 rpm (peak)	11.5**
	Governor	N/A	Automatic ground speed sensing, Internally geared-in unitized transaxle
	Governed RPM	N/A	3050 ± 30
	Ignition	N/A	Electronic w/electronic RPM limiter
	Drive Unit	12.3:1 direct-drive axle, double reduction helical gear	Unitized Transaxle, helical gears: 11.8:1 forward, 17.1:1 reverse
	Electrical System	48-volt	12-volt, 500 cca 105 min. reserve
	Batteries	Eight 6-volt, Standard = 115 min @ 75 amps; Heavy Duty = 145 min @ 75 amps	N/A
	Charger	Automatic, computer-controlled 48-volt DC, 17 amp, UL and CUL listed; International CE marked available	N/A
	Controller	500 amp Solid State	N/A
STEERING/ SUSPENSION	Steering	Self-adjusting rack & pinion	Self-adjusting rack & pinion
	Front Suspension	Independent leaf spring with dual hydraulic shocks	Independent leaf spring with dual hydraulic shocks
	Rear Suspension	Leaf springs with dual hydraulic shocks	Leaf springs with dual hydraulic shocks
	Brakes	Four Wheel Mechanical Drum	Four Wheel Mechanical Drum
	Park Brake	Foot-operated, multi-lock	Foot-operated, multi-lock
	Stabilizer Bar	No	Yes
FRAME/CHASSIS	Frame/Chassis	Aluminum I-Beam	Aluminum I-Beam
	Front Body	ArmorFlex®	ArmorFlex®
	Rear Body	All aluminum	All aluminum
	Body Finish	Matching paint over molded in color	Matching paint over molded in color
	Light Package	Std. Light Package	Std. Light Package
	Front Tires	18 x 6.50-8, 6-ply rated, Premium tread	18 x 6.50-8, 6-ply rated, Premium tread
	Rear Tires	18 x 8.50-8, 6-ply rated, Premium tread	18 x 8.50-8, 6-ply rated, Premium tread
	Instrumentation	Battery capacity indicator, battery warning light	Battery capacity indicator, battery warning light
DIMENSIONS	Total Vehicle Capacity	1500 lb (681 kg)	1500 lb (681 kg)
	Overall Length	133" (337.8 cm)	133" (337.8 cm)
	Overall Width	49.3" (125.2 cm)	49.3" (125.2 cm)
	Overall Height	48.0" (121.9 cm)	48.0" (121.9 cm)
	Wheelbase	98.5" (250.2 cm)	98.5" (250.2 cm)
	Ground Clearance Under Differential	4.5" (11.4 cm)	4.5" (11.4 cm)
	Fuel Tank Capacity	N/A	7 gallons (26.5 liters)
	Tread	34.5"/38.5" (87.6 cm/97.8 cm)	34.5"/38.5" (87.6 cm/97.8 cm)
	Dry Weight	717 lb (325.5 kg)	842 lb (382.3 kg)
	Speed Range	5 - 17 mph (8-27.3 kph)	14 - 16 mph (22.5-25.7 kph)
	Outside Clearance Circle	24.7 ft (7.5 m) dia.	24.7 ft (7.5 m) dia.
	Turning Radius	12 ft (3.7 m)	12 ft (3.7 m)
	Intersecting Aisle Radius	90" (228.6 cm)	90" (228.6 cm)
	Vehicle Warranty	2-year limited*	2-year limited

*4-year, limited battery warranty for electric vehicles **Maximum hp @3,600 rpm exceeds SAE J1940 Performance Standards

Options and Accessories



Lighting Package*



Turn Signals



One-Piece
Windshield



Fold-Down
Windshield



West Coast Mirror/
Heavy-Duty Bumper



Glove Box With Lock



Fold-Down Seat



Post-Mounted
Safety Strobe



Certified ROPS
Cab Enclosure



Heavy-Duty
Batteries



Hour Meter



Extra-Traction Tires



Communication
Display Module



Canopy Top



3-Sided Enclosure



Wheel Covers

*Headlights, Taillights,
Brakelights and Horn

There are no warranties, express or implied, contained herein. See Limited Warranty found in the owner's manual or write to Club Car, Inc. The company reserves the right to make design changes without obligation to make these changes on units previously sold. These vehicles are designed and manufactured for off-road use only. They do not conform to Federal Motor Vehicle Safety Standards for automobiles or to FMVSS 500 for low-speed vehicles, and are not equipped for operation on public streets, roads or highways.



Ingersoll Rand is a global diversified industrial firm providing products, services and solutions to transport and protect food and perishables, secure homes and commercial properties, and enhance industrial productivity and efficiency. Driven by a 100-year-old tradition of technological innovation, we enable companies and their customers to create progress.

1.800.CLUBCAR • +1 706.863.3000

www.clubcar.com www.ingersollrand.com