

Options and Accessories



Lighting Package*



Turn Signals



One-Piece
Windshield




Fold-Down
Windshield



West Coast Mirror/
Heavy-Duty Bumper



Glove Box
With Lock



Cargo Box



Stake-Side Kit



Bed Mat



Trailer Hitch



Post-Mounted
Safety Strobe



Heavy-Duty
Batteries



Hour Meter



Extra-Traction Tires



Certified ROPS
Cab Enclosure



Communication
Display Module



3-Sided Enclosure



Canopy Top



Wheel Covers

*Headlights, Taillights, Brakelights and Horn

Club Car supports only the safe and legal use of our products. To reduce the risk of injury, always operate and travel within these vehicles in a safe, lawful and conscientious manner. The vehicles referenced herein are designed and manufactured for off-road use only. As such, they do not conform to Federal Motor Vehicle Safety Standards for automobiles or Low Speed on-road motor Vehicles. For further information on these products (including a full description of the Limited Warranty), please review the applicable owner's manual or contact Club Car, Inc.



Ingersoll Rand is a global diversified firm providing products, services and solutions to enhance the quality and comfort of air in homes and buildings, transport and protect food and perishables, secure homes and commercial properties, and increase industrial productivity and efficiency. Driven by a 100-year-old tradition of technological innovation, we enable our customers to create progress and a positive impact in their world.

1.800.CLUBCAR • +1 706.863.3000

www.clubcar.com www.ingersollrand.com

Club Car®

TransPorter 4

TRANSPORTATION VEHICLE



TransPorter 4

Designed with four passenger seating and a generous cargo area, the TransPorter 4 offers a comfortable and convenient ride. It's what you'd expect from Club Car, the world's largest producer of electric vehicles. Meet guests at the airport, give a tour of your facility or put it to work as a utility



vehicle for your staff. With an exclusive aluminum frame up to three times stronger than comparable steel, Club Car TransPorter vehicles are not only comfortable, they're tough and corrosion-resistant to yield maximum durability.



Features

Club Car's exclusive ZEV IQ Plus system or 11.5 hp gas engine



Seating for four, plus stake-side cargo bed



Molded, seamless vinyl seats



Rugged, rustproof aluminum frame, and chassis



Self-adjusting, maintenance-free rack & pinion steering




ArmorFlex® fade-resistant front body



Standard Color: Dark Gray

Optional Colors: Beige, Gray, Green, White, Classic Blue, Red, Black and Burgundy

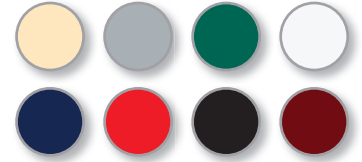

Smooth, independent front and semi-independent rear suspension



6-ply, premium tread tires



Additional Features

- Maximum speed of 17 mph (27.3 kph) (Electric vehicles only)
- 1,500 lb (681 kg) total vehicle capacity
- Headlights, taillights, brakelights and horn
- Maximum hp @ 3,600 rpm exceeds SAE J1940 Performance Standards
- Redesigned hip restraint for maximum styling and comfort
- Reconfigured dash
- 48-volt ZEV IQ Plus electric motor or 351 cc, 11.5 hp gas, pedal-start engine
- Side fuel fill
- Four-wheel brakes

Specifications

TransPorter 4 Electric
with exclusive ZEV IQ Plus System



TransPorter 4 Gasoline

	TransPorter 4 Electric with exclusive ZEV IQ Plus System	TransPorter 4 Gasoline	
POWER SUPPLY	Engine	N/A	Kawasaki 4-cycle, OHV, 351 cc, single cylinder, air-cooled, pressure-lubricated, spin-on oil filter
	Drive Motor	48-volt Shunt/Sepex	N/A
	Horsepower	3.7 @ 3,400 rpm (continuous) 21.0 @ 2,000 rpm (peak)	11.5**
	Governor	N/A	Automatic ground speed sensing, Internally geared-in unitized transaxle
	Governed RPM	N/A	3,050+/-30
	Ignition	N/A	Electronic w/electronic rpm limiter
	Drive Unit	12.3:1 direct-drive axle, double reduction helical gear	Unitized Transaxle, helical gears: 11.8:1 forward, 17.1:1 reverse
	Electrical System	48-volt	12-volt, 500 CCA 105 min. reserve
	Batteries	Eight 6-volt, Standard = 115 min @ 75 amps; Heavy Duty = 145 min @ 75 amps	N/A
	Charger	Onboard with reel, automatic, computer-controlled 48-volt DC, 17 amp, UL and CUL listed; International CE marked available	N/A
	Controller	500 amp solid state	N/A
STEERING/ SUSPENSION	Steering	Self-adjusting rack & pinion	Self-adjusting rack & pinion
	Front Suspension	Independent leaf spring with dual hydraulic shocks	Independent leaf spring with dual hydraulic shocks
	Rear Suspension	Leaf springs with dual hydraulic shocks	Leaf springs with dual hydraulic shocks
	Brakes	Four-wheel, mechanical drum	Four-wheel, mechanical drum
	Park Brake	Foot-operated, multi-lock	Foot-operated, multi-lock
	Stabilizer Bar	No	Yes
FRAME/CHASSIS	Frame/Chassis	Aluminum I-Beam	Aluminum I-Beam
	Front Body	ArmorFlex®	ArmorFlex®
	Rear Body	All aluminum	All aluminum
	Body Finish	Matching paint over molded in color	Matching paint over molded in color
	Light Package	Std. light package	Std. light package
	Front Tires	18 x 6.50-8, 6-ply rated, Premium Tread	18 x 6.50-8, 6-ply rated, Premium Tread
	Rear Tires	18 x 6.50-8, 6-ply rated, Premium Tread	18 x 6.50-8, 6-ply rated, Premium Tread
	Instrumentation	Battery capacity indicator, battery warning light	Battery capacity indicator, battery warning light
DIMENSIONS	Cargo Box Size	34" x 43.8" x 17.5" (15.1 ft ³) (86.4 cm x 111.3 cm x 44.5 cm)	34" x 43.8" x 17.5" (15.1 ft ³) (86.4 cm x 111.3 cm x 44.5 cm)
	Flat Bed Size	35.8" x 44.3" (90.0 cm x 112.5 cm)	35.8" x 44.3" (90.0 cm x 112.5 cm)
	Bed Height	27" (68.6 cm)	27" (68.6 cm)
	Bed Capacity	300 lb (136.2 kg)	300 lb (136.2 kg)
	Total Vehicle Capacity	1,500 lb (681 kg)	1,500 lb (681 kg)
	Overall Length	133.5" (339.1 cm)	133.5" (339.1 cm)
	Overall Width	49.3" (125.2 cm)	49.3" (125.2 cm)
	Overall Height	48.0" (121.9 cm)	48.0" (121.9 cm)
	Wheelbase	98.5" (250.2 cm)	98.5" (250.2 cm)
	Ground Clearance Under Differential	4.5" (11.4 cm)	4.5" (11.4 cm)
	Fuel Tank Capacity	N/A	5 gal. (19 liters)
	Tread	34.5"/38.5" (87.6 cm/97.8 cm)	34.5"/38.5" (87.6 cm/97.8 cm)
	Dry Weight Less Batteries	700 lb (317.8 kg)	825 lb (374.6 kg)
	Speed Range	5 - 17 mph (8-27.3 kph)	14 - 16 mph (22.5-25.7 kph)
	Outside Clearance Circle	24.7 ft (7.5 m) dia.	24.7 ft (7.5 m) dia.
	Turning Radius	12 ft (3.7 m)	12 ft (3.7 m)
	Intersecting Aisle Radius	90" (228.6 cm)	90" in (228.6 cm)
Vehicle Warranty	2-year, limited/4-year batteries*	2-year, limited	

*4-year, limited battery warranty for electric vehicles **Maximum hp @3,600 rpm exceeds SAE J1940 Performance Standards